

# MP9025 5MIC&2AUX USB/FM Mixer Amplifier



## Features

- 70V, 100V & 4-16 Ω, rated power 250W
- 5 microphone inputs, 2 aux line input & 1 channel line output
- Self protection from short circuit, overload and high temp
- Individual volume control for each microphone and line input
- Bass and treble control.

## Description


This mixing amplifier is rated at 60W. It has 5 unbalanced microphones inputs and 2 aux inputs. Bass and treble controls and master volume control are provided. Tuning and MP3 converting play is very convenient.

This amplifier can be applied to different cases, such as supermarket, classroom, etc.

## Specification

<b>Model No.</b>	<b>MP9025</b>
<b>Rated output</b>	250W
<b>Speaker output</b>	70V, 100V & 4-16 Ω,
<b>Input sensitivity</b>	Mic1,2,3,4,5 with phantom power supply (optional): 600Ω, 2.5mV(±0.5mV)
	AUX1,2 : 10kΩ , 250mV(±50dB)
	EMC IN : The 10kΩ, 250mV(±50mV)
<b>Frequency response</b>	Line : 50Hz-20kHz (±3dB); Mic : 100Hz-10kHz (±3dB)
<b>Harmonic distortion</b>	Less than 1% at 1kHz, 1/3 rated output voltage
<b>Signal/noise ratio</b>	Mic1, Mic2, Mic3 and Mic4, Mic5 : 70dB
	AUX1 and AUX2 : 75dB
	Treble : ±10dB (10kHz)
<b>Protection</b>	AC fuse×1, overload, short-circuit
<b>Power consumed</b>	500W
<b>Outer Packing Size (mm)</b>	(L×W×H)525×460×140
<b>Unit Size (mm)</b>	(L×W×H)430×368×88
<b>Gross weight</b>	15.2kg
<b>Net weight</b>	17.2kg

## Rear Panel

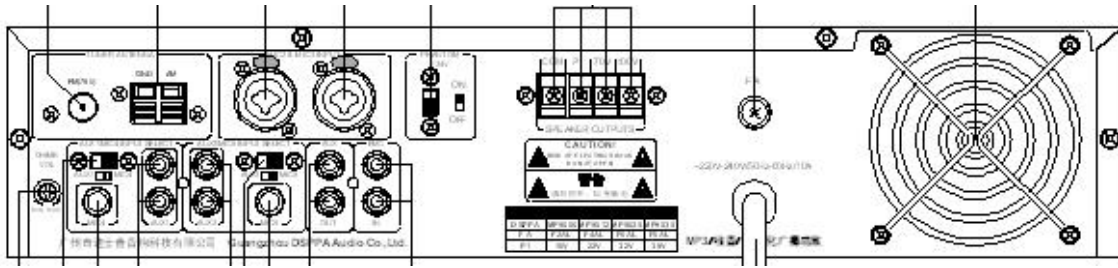

## Connection

