


FP-3808

Directional Sound Focusing Dome Speaker

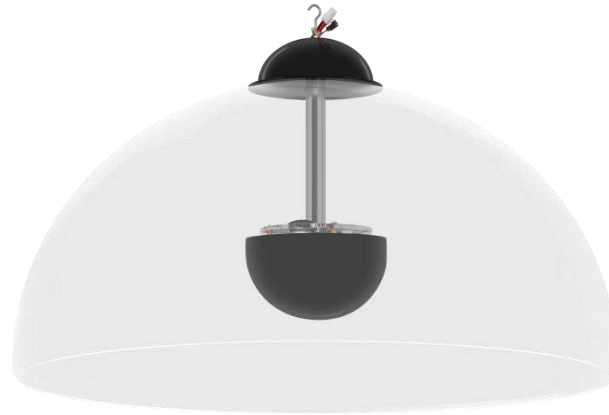

Description

Using the principle of sound focusing, a relatively independent music area is created, focusing the sound like the beam of a flashlight. The sound is clearest in the parabolic dome, and the sound played in each area does not interfere with each other.

This product is composed of sound focusing speaker and decoding player. It supports remote control operation, customized audio and video playback, and the installation is simple and easy.

Features


- Rated power 30W.
- Built-in infrared sensor for listeners.
- Built-in high-efficient stereo amplifier.
- Support USB/SD as audio or video source.
- With independent Bass/Treble/Volume adjustment.
- Target stereo audio in a narrow footprint.
- Be able to accommodate 1 to 3 listeners at the same time.
- Support HDMI connect with screen for video/photos/text display.

Specifications

	Model	FP-3808
Power	RMS	30W
	SNR	≥81dB
	Distortion	≤0.8%
Speaker	Unit Driver	5.25"×1
	Sensitivity	90±2dB
	MAX. SPL.	80±2dB
	Frequency Response	143Hz-21.5kHz


	Decoding Format	MP3, WAV, FLAC, APE, MPEG4, H264, DIVX3, etc.
	Working Temperature	-10°~50°
Others	Power	DC12V
	Dimensions of Focus Speaker (H×W×D)	430×760×760mm
	Dimensions of Decode Player (H×W×D)	21×140×91mm
	Net Weight	4.5kg

Product Information

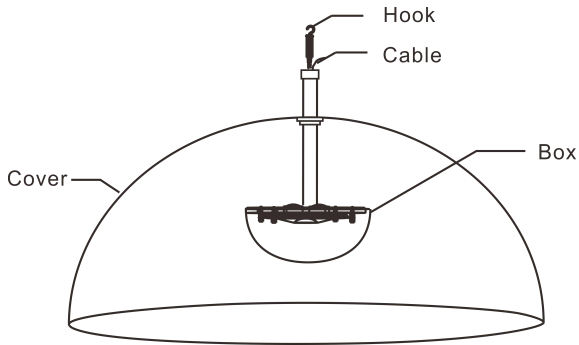


Recommended Mounting Height

About 2.5-3m from the ground

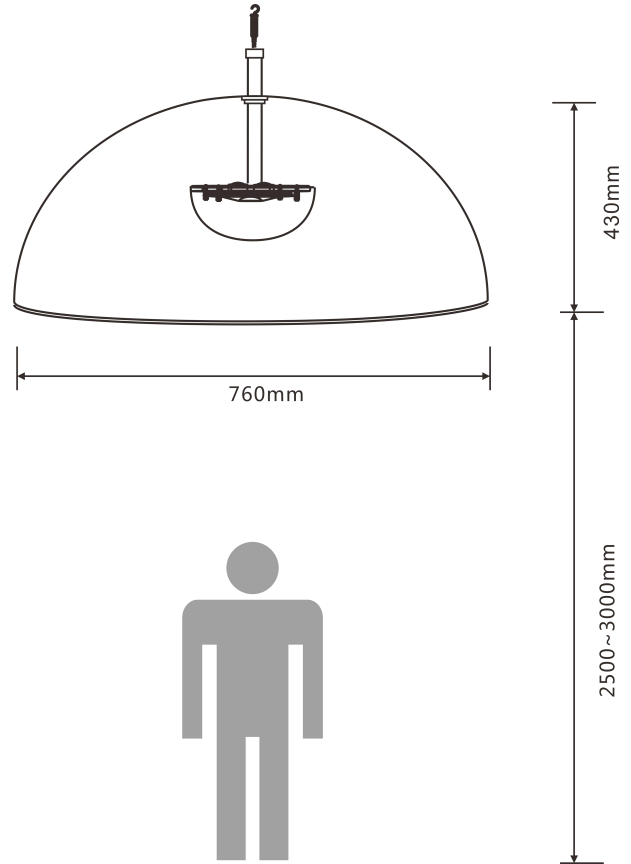


Product Connection Diagram

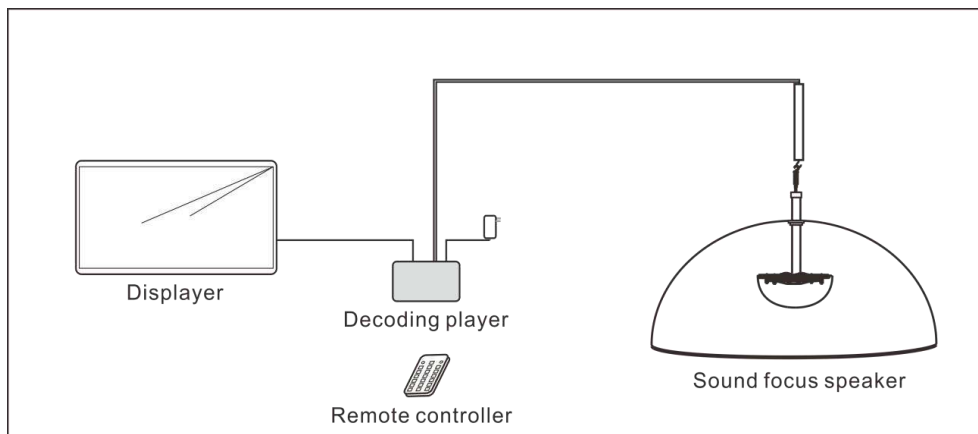


1. Connect the speaker with network cable, run the cable through the casing and hang it in a proper position.
2. Connect the decoding player with the speaker, display (optional) and power as the below diagram. And then insert SD card or USB.
3. Check if the installation is stable and reliable after the test.

Decoding Player

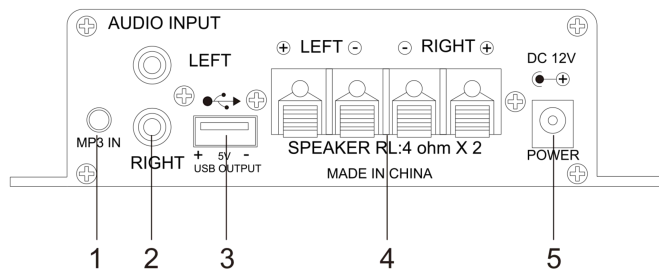

Amplifier

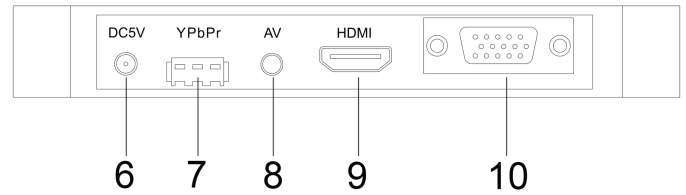

Media Player

1. MP3 input
2. Audio input
3. USB port
4. Speaker terminal
5. DC12V power supply(for Amplifier)
6. DC5V power supply(for Player)
7. YPbPr interface(Connect with speaker)
8. AV interface(connect with amplifier)
9. HDMI interface
10. VGA interface(connect with display screen)