

DSP643G

6.5 Inch Landscape Weather-Resistant Rock Speaker



Description

DSP643G is a landscape garden speaker with built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers. The high-class resin enclosure is of rock shape and weatherproof. It is with heavy damage proof finish. Easy and secure installation in outdoor area. It is an ideal choice for industrial and commercial applications in outdoor areas, such as train station, shopping mall, parking area and factory where background music and paging are needed.

Features


- Appearance design of rock, used in school, park and plaza grassplot ;
- Made of high-class resin, weight 5kg, sturdy and style graceful ;
- Voltage 70/100V, rated power 20W, sensitivity $87 \pm 2\text{dB}$, Max. Sound
- Pressure Level $100 \pm 2\text{dB}$, Effective Freq. Range 100Hz-15kHz;
- Provided with waterproof loudspeaker, long life, sounds clear and sonorousness.

Specifications


Model	DSP643G
Full Range	6.5"×1
Rated Power	20W
Max. Power	40W
Line Voltage	70/100V

Sensitivity (1M, 1W)	87±2dB
Max. SPL (1M)	100±2dB
Frequency Response	100Hz-15kHz
Dimension (L×W×H)	380×250×320mm
Weight	5.0Kg


Freq. Response (dB SPL, 1W,1m)

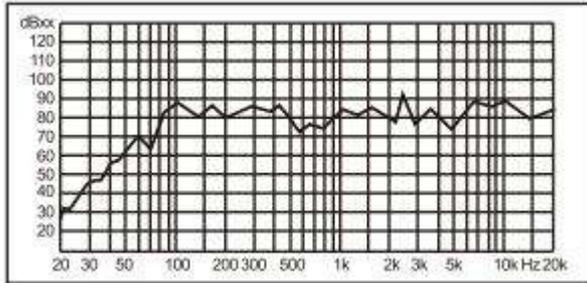

Distortion (THD< 1.5% 1W, 1m, 200Hz-10kHz)

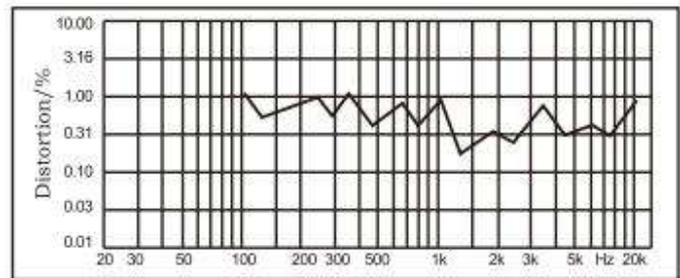

Dimension

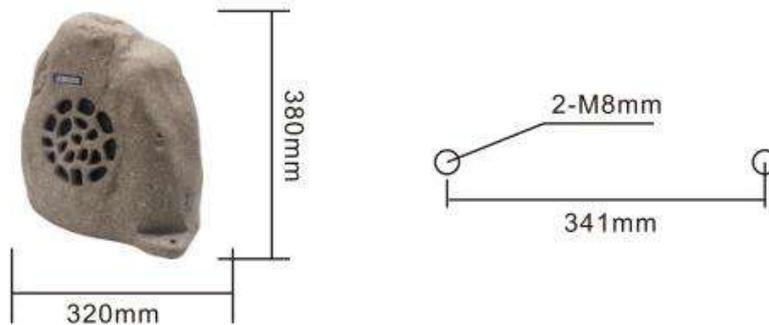

Notice: Due to the construction environment and product features above are for reference only, please check the product after the construction.

Installation

1. Setup a foundation like a platform with concrete and set 2 screws (8mm) stretching out 3cm in it as shown above after concrete rigidify continue;
2. Connect audio broadcasting wire to the speaker terminals according to the table below;

Power	Line		
Voltage		70V	100V
Terminals			
	Black---Blue	10W	20W
	Black---White	20W	-

3. Fix the speaker system with 2 nuts on screws of the foundation;
4. Finally, examine whether it is steady.